

## FEEDING DEVICE OF CHOCOLATES AND SIMILAR PRODUCTS

### TECHNICAL FIELD

5 The present invention relates to automatic packaging machines, and particularly the invention refers to a feeding device of chocolates or similar products with flat base for a wrapping machine.

### BACKGROUND ART

10

It is known that in the wrapping machine for chocolates and similar products with traditional wrapping styles the wrapping material must move parallelly to the product short side, which is moved along a direction parallel to the product long side for stability need. For this reason, usually the feeding devices, including one or more belts, are positioned perpendicularly to the product flow on the machine and, therefore, transversally with respect to the latter.

15

The main drawback of said devices consists in that their transversal position makes difficult the access to the maintenance points, positioned at opposite sides of said device, reducing the timeliness of the operator's intervention, particularly in case the operator must control several wrapping machines, parallelly positioned in an automatic feeding line, forcing to have an operator for each machine.

20

There are known feeding devices which allow to feed the products with the long side parallel to the machine by means of one or more storage belt, from which the products are transferred, for instance by pushers, to a disk, provided with housing slots, which rotates said products of 90°, in order to correctly orientate for picking or transferring them to the following machine working station.

25

The main drawback of said known device consists in the mechanical stresses, which the pushers, or the like, exert on the products, and in the unavoidable collisions thereof against the housing slot walls, during the 90° rotation working cycles. Said stresses can damage products, with possible fragment detachments that create unwanted dirt accumulation on the machine members.

30

35 Other drawback of the above described devices consists in that, for high production speeds, the

products tend to slip on the storage belt, till they miss their correct positioning in the picking or transfer zone within the machine cycle, in such a way causing idle cycles with consequent reduction of machine production.

- 5 Document EP-A-0872436 discloses a method for separating small objects, especially candies, and delivering them to a packaging machine by means of a first band conveyor and a directly following second band conveyor, which is driven at a slighter speed than the first conveyor. The small objects are furthered by the conveyors up to a pick-up position where they are seized by grippers of a revolving accelerator wheel, which are swung in such a way that a tangential  
10 speed of the grippers at the pick-up position is adjusted with a conveyor speed of the objects.

#### DISCLOSURE OF THE INVENTION

- The main object of the present invention is to propose a feeding device, which can operate at  
15 high speeds, guaranteeing a regular and reliable operation, without blockages, jams, and product feeding idle cycle, maintaining a product feeding synchronized with the machine.

- Other object of the present invention is to propose a device, which allows delicately handling and/or moving the product, avoiding breaks or damages thereof.

20

Further object is to propose a device, which is accurate and reliable and guarantees a perfect phase synchronization with the downstream wrapping machine.

- The above-mentioned objects are achieved according to the content the claim content.

25

#### BRIEF DESCRIPTION OF THE DRAWINGS

The characteristics of the present invention are underlined in the following with particular reference to the attached drawings, in which:

- 30 - figure 1 show a partial section front view of the feeding device of the present invention;  
- figure 2 shows a plan view of the figure 2 device;  
- figure 3 shows a partial section view according to plain III-III of figure 1;  
- figure 4 shows a front view of conveyer means of the figure 1 device;  
- figure 5 shows a section view according to plain V - V of figure 4.

35

### BEST MODE OF CARRYING OUT THE INVENTION

With reference to figures 1 to 5, numeral 1 indicates the feeding device of product 100 substantially constituted by belt means first 13, second 14 and third 16 and by a positioning wheel 9.

The first means belt 13 has a continuous advance motion and supports and moves a plurality of products 100, aligned and arranged in a single line at mutual contact forming a storage queue. The second belt means 14, which is aligned downstream the first belt means 13, has an alternate advance motion, that is a periodical intermittent motion, and it is associated with holding means 15 of product 100, which operate on the portion of said second belt means 14 on which the products 100 are positioned.

The third belt means 16, is aligned upstream the first belt means 13 with respect to the first belt means 13 and has a continuous advance motion, with a translation speed greater than the speed of first belt means 13.

The holding means 15 are constituted essentially by an air suction means 17 connected through a duct means 19 to at least an opening 18, carried out in the second belt 14, in order to hold and to constrain through suction the products 100 to the second belt 14.

The suction means 17 consists of a vacuum pump or a suction fan and the opening 18 may consist of a longitudinal slot, carried out by a couple of parallel and transversally spaced apart conveyor belts 22, which constitute the second belt 14. In alternative, the opening 18 may consist of a plurality of through holes carried out in the second belt means 14.

The duct means 19 is delta shaped and extends in a direction parallel to the second belt means 14 and is longitudinally divided in two specular portions 19A and 19B hermetically fixed each to the other, in such a way that the inner space is bounded by shaped surfaces which constitute a divergent duct which makes easier the quick evacuation of the air sucked by the suction means 17. Particularly, starting from a suction mouth 23, defined by the two portions 19A, 19B and at whose sides there are the conveyor belts 22, the cross section of duct means 19 internally widens with divergent side surfaces 30 up to connection conical portion of suction means 17.

The feeding group 10 includes two first sensor means 20 of minimum and maximum load, fit to

sense the presence of products 100 on the first belt means 13 and in particular fit to measure respectively the minimum and maximum dimensions of the storage queue of products 100 on said belt, in order to balance the upstream product flow with wrapping machine speed.

5 There are furthermore second sensor means 25, positioned close to the portion of second belt means 14, which is adjacent to the positioning wheel 9, and fit to sense the presence and the correct position of product 100 and to define consequently operational phase between belt 14 and wheel 9.

10 The sensor means 20, 25 are of known type, such as inductive, capacitive or optical type, for instance photocells or optical fibers.

The second belt means 14 is rotatably powered by an electric motor 21 of brushless type, position, speed and acceleration controlled, in such a way to move according to predefined and  
15 programmable motion laws, while the belt means first 13 and third 16 are rotated by a ratio-motor 24.

The positioning wheel 9 rotates on a vertical axis and has four pliers means 11, angularly equally spaced apart, which grasp the product 100 from the second belt means 14. The pliers  
20 means 11 are positioned at 90° one with respect to the other and they are fixed to the wheel 9 with an orientation almost tangential to a geometric circumference inscribed in the positioning wheel 9.

The positioning wheel 9 is substantially constituted by a first column 61 of the device 1,  
25 rotatably supporting a second column 62 and a third column 63, coaxial thereto and independently rotating on a vertical axis.

Each pliers means 11 is fixed, through a support plate 68, to the third column 63 and includes a couple of mobile tines 12, symmetrically rotating between a closing condition C, in which said  
30 tines 12 are at their minimum distance for grasping a product 100, and an opening condition D, in which they are at the maximum distance for releasing said product 100.

The opening and the closing of mobile tines 12 of each pliers means 11 is made through transmission means 65, connected to control means 64 of the second column 62 and moved by  
35 these last control means 64, by virtue of the partial alternate rotation of said second column 62.

Each transmission means 65 is essentially constituted by a pivot 67, which is slidably supported by the third column 63 and connected to the mobile tines 12 of the respective pliers means 11 through a pinion-rack connection. Furthermore the pivot 67 is slidably engaged, through sliding rolls 66, to a cam profile of control means 64 fixed to the second column 62.

The swinging of cam profile, controlled by an eccentric movement, causes the rising or descending translation of pivots 67 and, consequently, respectively the opening or closing rotation of mobile tines 12 of pliers means 11.

10

The feeding device 1 is entirely controlled by calculation and control electronic means fit to control the phase relations among the belt means 13, 14, 16, the sensor means 20, 25, the positioning wheels and the pliers means 11.

15 The operation of feeding group 10 provides that the belt means third 16 and first 13 move the products 100 with uniform and continuous rectilinear motion at the respective decreasing speeds to guarantee a storage queue of products 100, controlled by minimum and maximum load sensor means 20, sufficient to feed without discontinuity the following second belt means 14. The latter moves with an alternate motion law, having a stroke equal to the product length to be  
20 moved and with a speed varying from a minimum value equal to zero to a maximum value, which is function of the machine cycle.

The passage condition of product 100 from the belt means 13 to the belt means 14 is guaranteed in that the constant speed of the belt means 13 is higher than the average speed of belt means  
25 14. The effect of different speeds is particularly evident at the beginning of the feed cycle of belt means 14, when the speed of said belt means 14 is zero in a single instant, in the picking condition A. The slow acceleration of the feed cycle of belt means 14 guarantees that the product 100 sticks to the belt means in such way that the suction effect allows positioning said product 100 without slipping.

30

The final deceleration allows the product 100 to be grasped, in a transfer position T, by pliers means 11 of the positioning wheel 9. The particular geometric position of the pliers means 11 on the positioning wheel 2, allows rotating product 100, grabbed by the pliers means 11 without interference with a coming following product.

35

In moving conditions M of second belt means 14, in which the products are moved thereby, the holding means 15 maintain each product 100 fixed to belt means 14, avoiding slipping phenomenon which could create between the products gaps, which can not filled anymore, or even collisions between the products.

5

The second belt means 14 is preferably moved with an alternate motion according to a motion law of asymmetrical cycloidal type, with symmetry ratio of 1,5. Such law has duration of the acceleration phase equal to  $\frac{3}{4}$  of the whole cycle and a deceleration phase equal to  $\frac{1}{4}$  of the cycle.

10

During the device 1 operation, the positioning wheel 9 takes the product 100 from the second belt means 14 and moves said product 100 with alternated circular motion from the transfer condition T to a release condition R, in which the wheel 9 is motionless and the related pliers means 11 holding the product 100 is opened for transferring the latter to the elevator group 5.

15

The main advantage of the present invention is to provide a feeding device, which can operate at high speeds, guaranteeing a regular and reliable operation, without blockages, jams and product feeding idle cycle.

20

Other advantage of the present invention is to provide a device, which allows delicately handling and/or moving the product, avoiding breaks or damages thereof.

Further advantage is to provide a device, which is accurate and reliable and guarantees a perfect phase synchronization with the downstream wrapping machine.

## CLAIMS

1) Feeding device of chocolates and similar products (100) for a wrapping machine including:

- a first belt means (13), which has a continuous advance motion, supports and moves a plurality of products (100), aligned and arranged in a single line at mutual contact;
  - a second belt means (14), aligned downstream the first belt means (13), having an alternate advance motion and associated to holding means (15) of the product (100);
  - said device being characterized in that comprises a positioning wheel (9) which rotates on a vertical axis and includes at least four pliers means (11), mutually positioned at 90° and fixed to the wheel (9) with an orientation almost tangential to a circumference inscribed in the positioning wheel (9); the positioning wheel (9) facing the second belt means (14) immediately downstream the holding means (15) and having angularly equidistant a plurality of pliers means (11) for gripping the product (100);
- the second belt means (14) moves the products (100), reciprocally spaced, from a picking condition (A), in which the second belt means (14) receives the product (100) from the first belt means (13), through moving conditions (M), in which the holding means (15) keep each product (100) fixed to the second belt means (14), to a transfer condition (T), in which the second belt means (14) is motionless and the product (100), not constrained thereto anymore, is grasped by a pliers means (11) of the positioning wheel (9), which moves the product (100) with circular motion, from the transfer condition (T) to a release condition (R) in which the wheel (9) is motionless and the pliers means (11) is opened for transferring the product (100) to the wrapping machine.

2) Device according to claim 1 characterized in that includes a third belt means (16) aligned upstream the first belt means (13), having a continuous advance motion.

3) Device according to claim 2 characterized in that the first belt means (13) has a translation speed lower than the speed of third belt means (16) and higher than the average translation speed of second belt means (14).

4) Device according to claim 1 characterized in that the holding means (15) includes at least an air suction means (17) connected through duct means (19) to at least an opening (18) of second belt means (14), in order to hold by suction each product (100) supported by the second belt means (14).

- 5) Device according to claim 4 characterized in that the suction means (17) consists of a vacuum pump or a suction fan.
- 6) Device according to claim 4 characterized in that the opening (18) includes a plurality of through holes carried out on the second belt means (14).
- 5 7) Device according to claim 4 characterized in that the second belt means (14) consists of a couple of conveyor belts (22) parallel and transversally spaced apart by at least the opening (18), shaped as longitudinal slot.
- 10 8) Device according to claim 4 characterized in that the duct means (19) has an elongated shape and includes a suction mouth (23) in flow communication with at least the opening (18).
- 15 9) Device according to claim 8 characterized in that the duct means (19) include at least an inner duct having a divergent shape, starting from the suction mouth (23) up to the connection with the suction means (17).
- 20 10) Device according to claim 1 characterized in that includes at least sensor means first (20) and second (25), of optical or inductive or capacitive type, fit for sensing the presence of products (100) respectively in correspondence of the first belt means (13) and of the second belt means (14).
- 25 11) Device according to claim 1 characterized in that the second belt means (14) is rotated by an electric motor (21) of brushless type, controlled in position, speed and acceleration.
- 12) Device according to claim 1 and 2 characterized in that that the belt means, first (13) and third (16), are rotated by at least a respective electrically-operated geared motor (24).
- 30 13) Device according to claim 1 characterized in that the positioning wheel (9) includes a first column (61) fixed to the device (1) and rotatably supporting a second column (62) and a third column (63), coaxial thereto and independently rotating on a vertical axis.
- 35 14) Device according to claim 13 characterized in that each pliers means (11) is fixed, through a support plate (68), to the third column (63) and includes a couple of mobile tines (12), symmetrically rotating between a closing condition (C), in which said tines (12) are at the



minimum mutual distance for gripping a product (100), to an opening condition (D), in which they are at the maximum mutual distance for releasing said product (100).

- 15) Device according to claim 14 characterized in that each pliers means (11) includes  
5 transmission means (65) connected to control means (64) of the second column (62), these last ones being fit to open and close the mobile tines (12) of each pliers means (11), through the rotation of said second column (62).
- 16) Device according to claim 15 characterized in that each transmission means (65) includes at  
10 least a pivot (67), slidably supported by third column (63), connected to the mobile tines (12) of the respective pliers means (11) through a pinion-rack connection, and slidably engaged by sliding rolls (66) to a cam profile of the control means (64).
- 17) Device according to any of the preceding claims characterized in that is totally controlled by  
15 electronic calculation and control means fit to control the phase relations at least among the belt means (13, 14, 16), the positioning wheel (9) and the pliers means (11).

ABSTRACT

A feeding device of chocolates and similar products (100) for a wrapping machine includes:

- 5     - a first belt means (13), which has a continuous advance motion, supports and moves a plurality of products (100), aligned and arranged in a single line at mutual contact;
- a second belt means (14) aligned downstream the first belt means (13), having an alternate advance motion and associated to holding means (15) of the product (100);
- 10    - a positioning wheel (9) rotating, facing the second belt means (14) immediately downstream the holding means (15) and having a plurality of angularly equidistant pliers means (11) for gripping the product (100).

The second belt means (14) moves the products (100), reciprocally spaced, from a picking condition (A), in which the second belt means (14) receives the product (100) from the first belt means (13), through moving conditions (M), in which the holding means (15) keep each product  
15   (100) fixed to the second belt means (14), to a transfer condition (T), in which the second belt means (14) is motionless and the product (100), not constrained thereto anymore, is grasped by a pliers means (11) of the positioning wheel (9), which moves the product (100) with circular motion, from the transfer condition (T) to a release condition (R) in which the wheel (9) it motionless and the pliers means (11) is opened for transferring the product (100) to the  
20   wrapping machine.



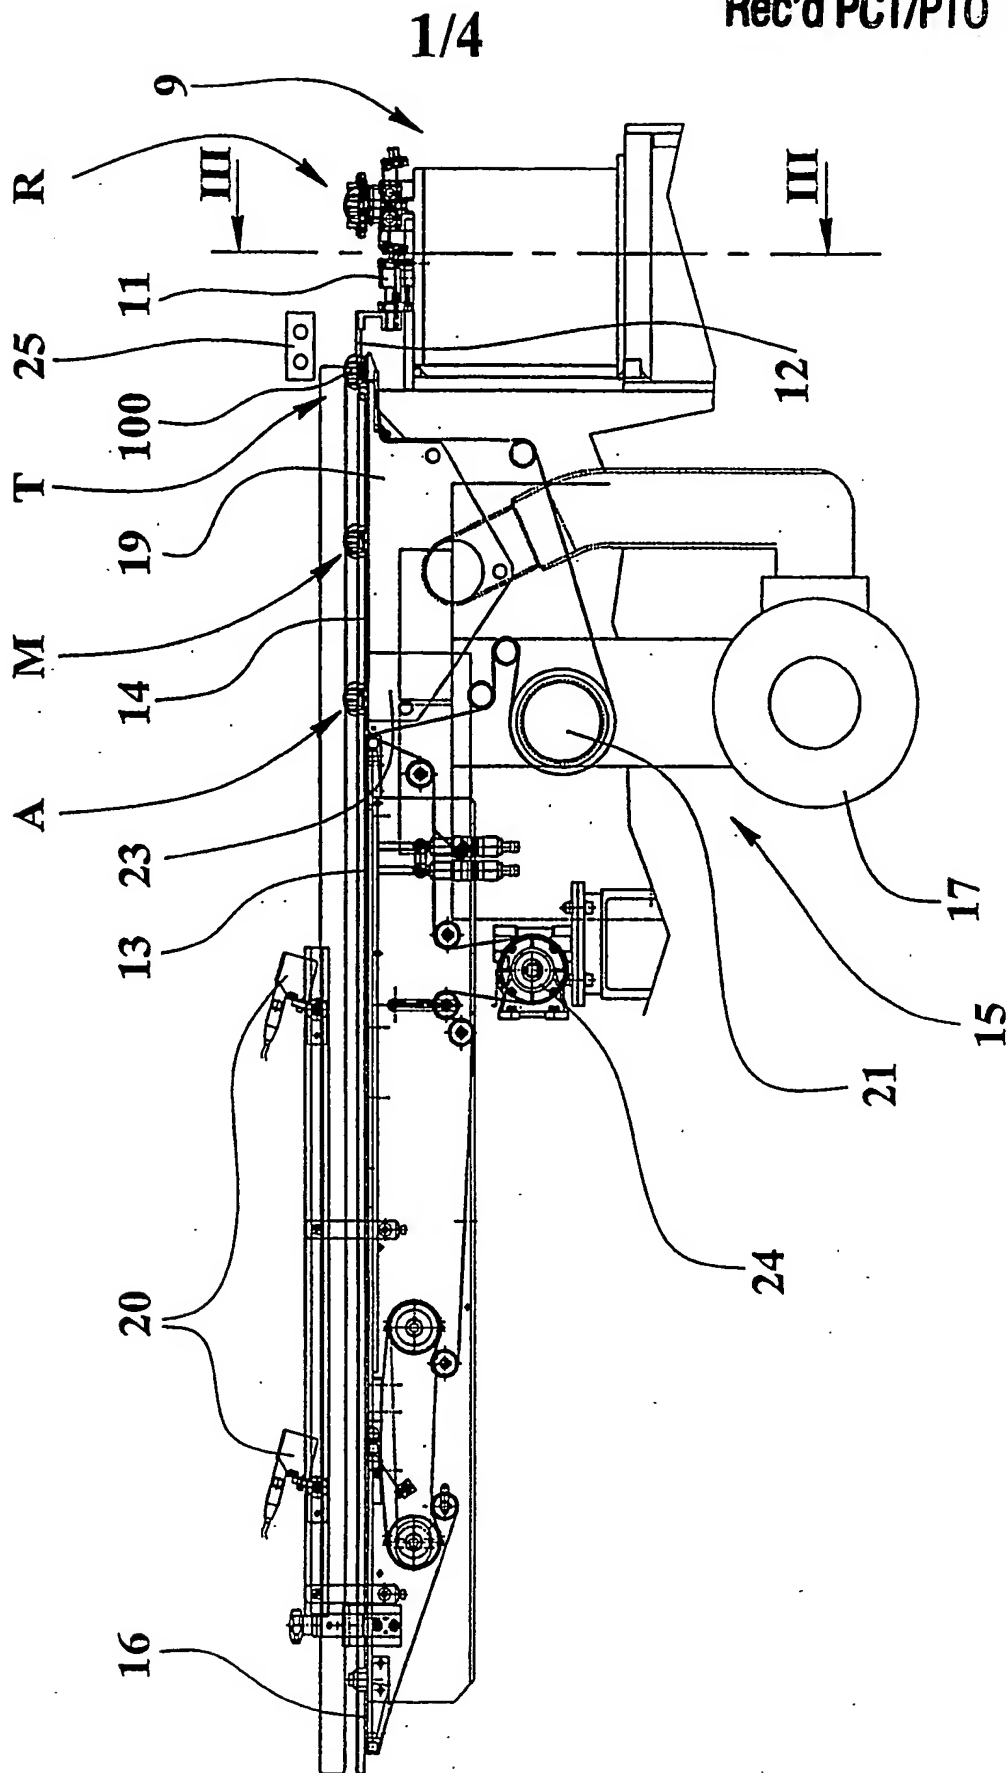


FIG.2


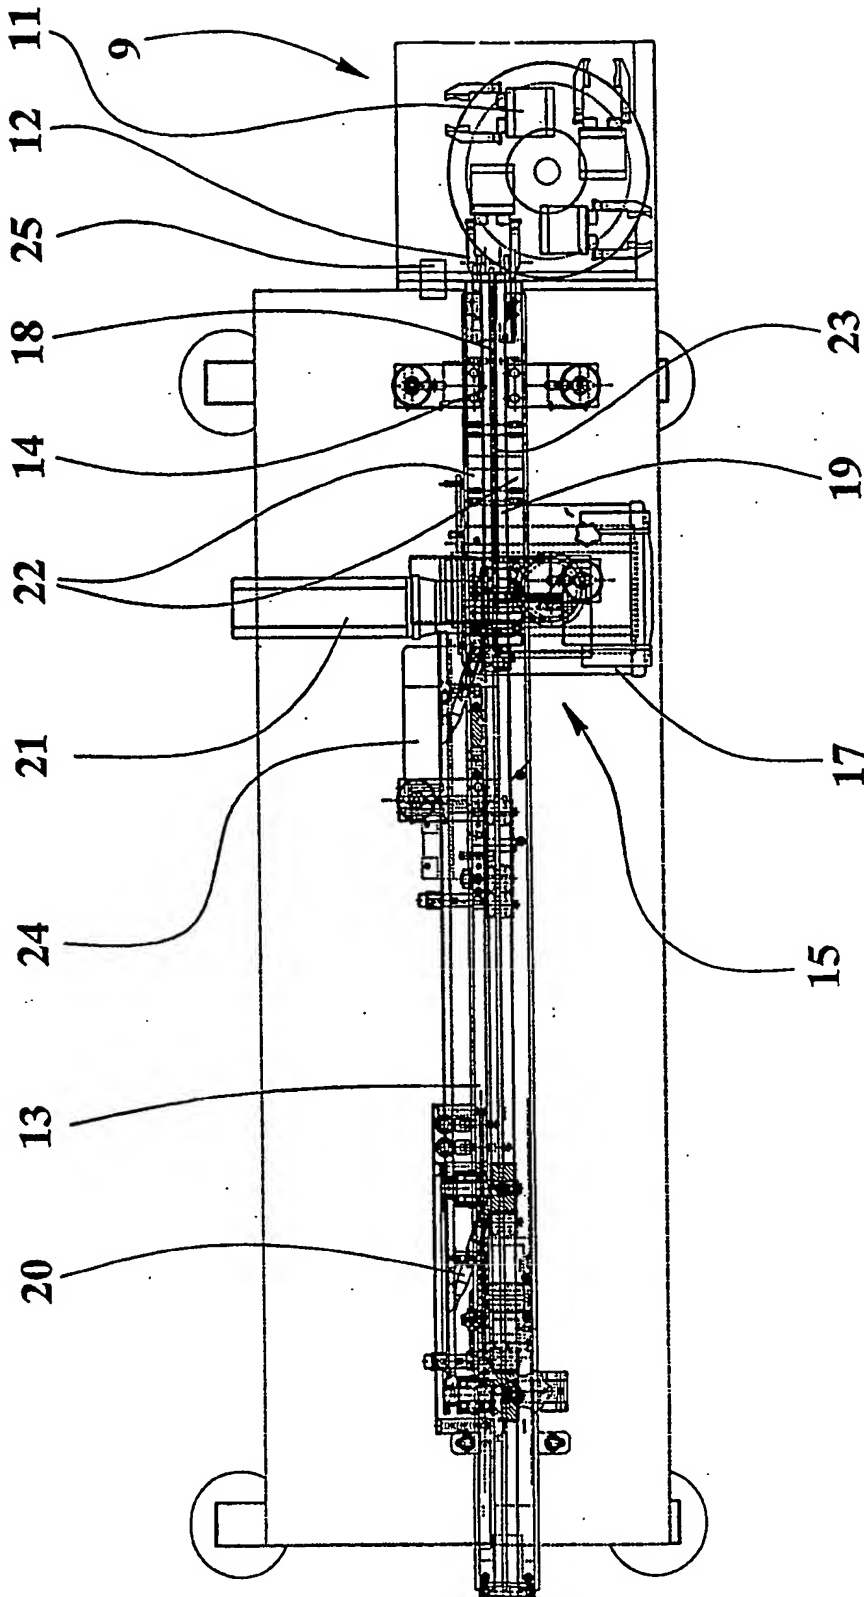


3/4

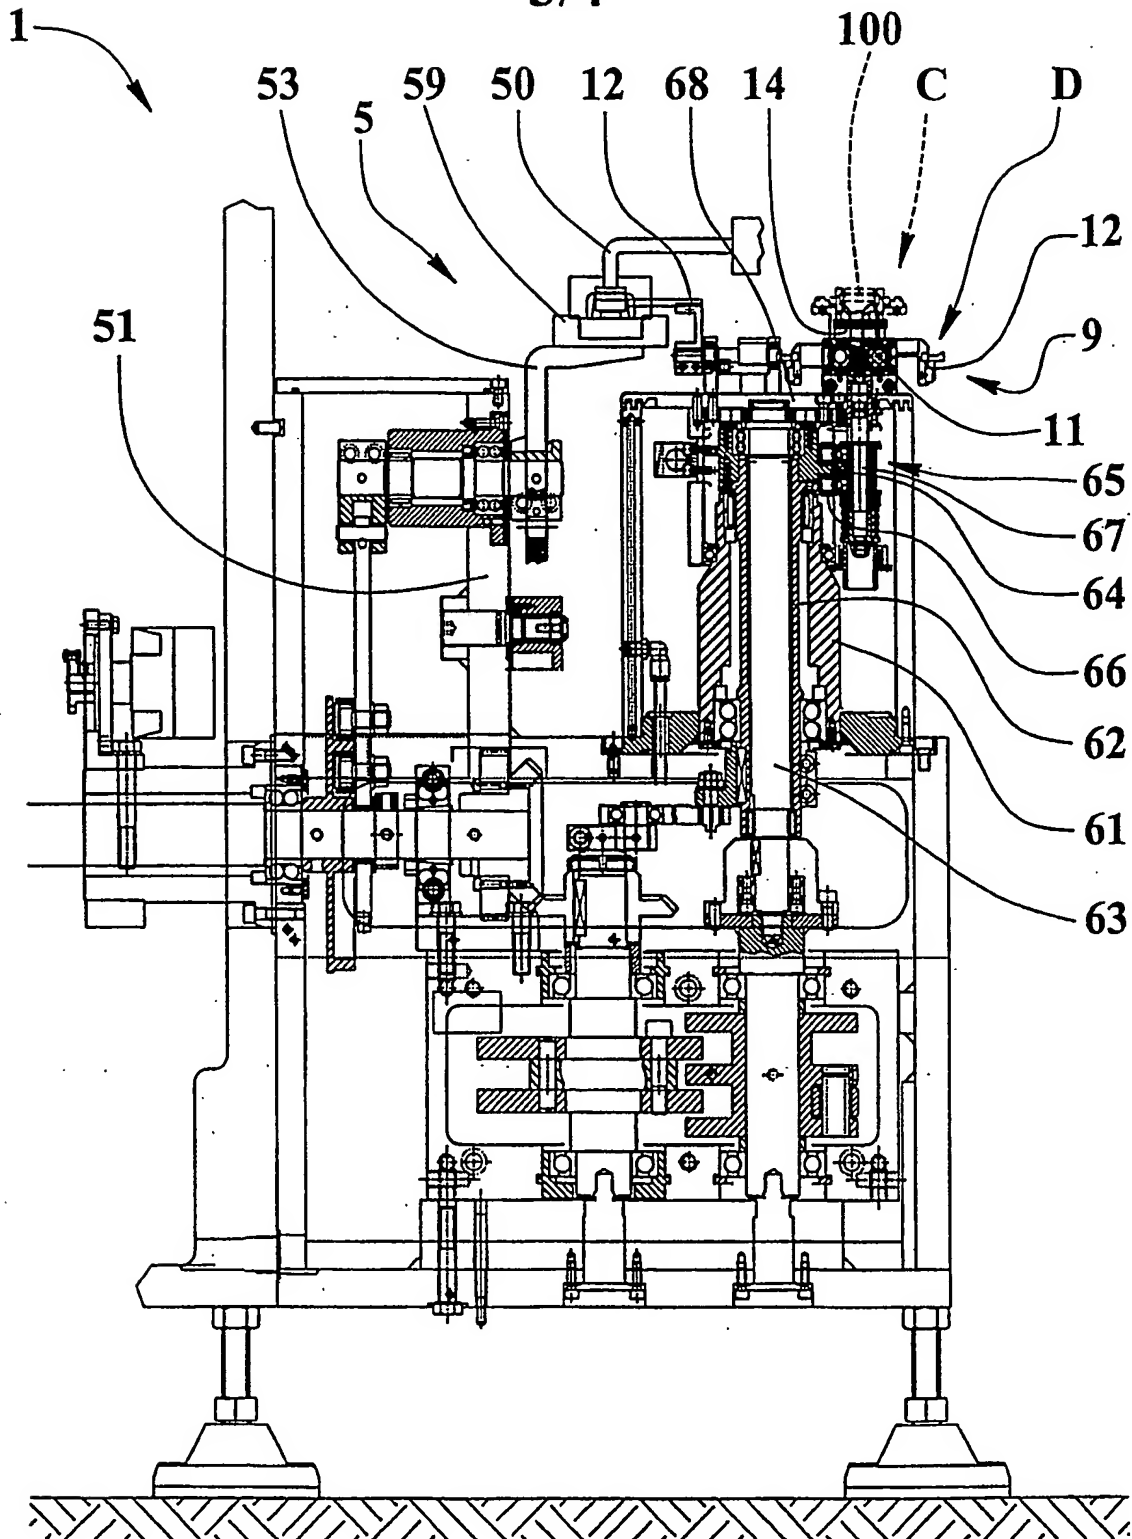

**FIG.3**

**FIG.5**

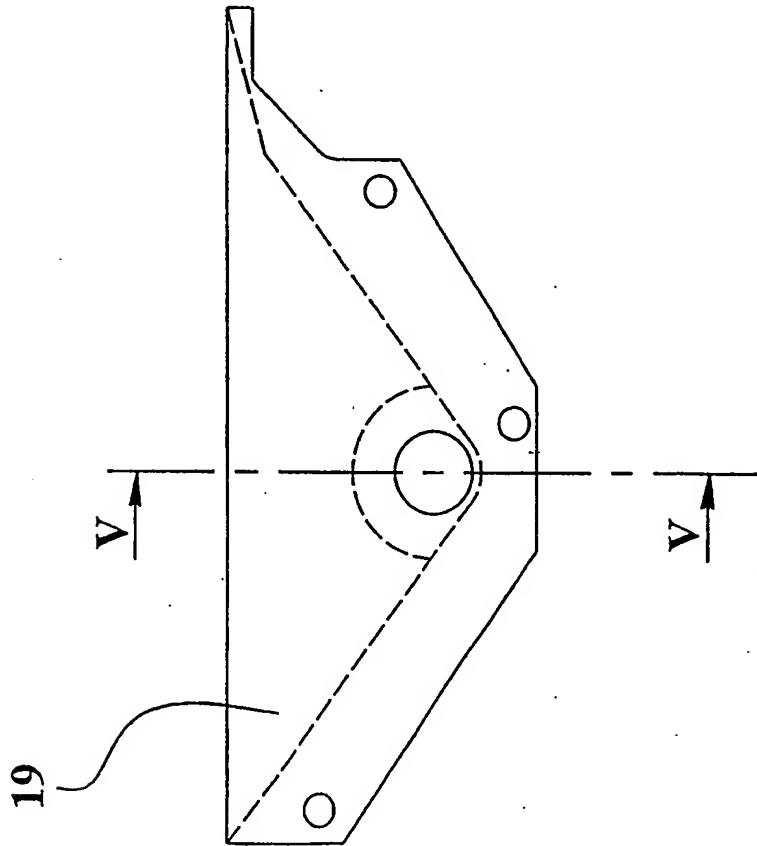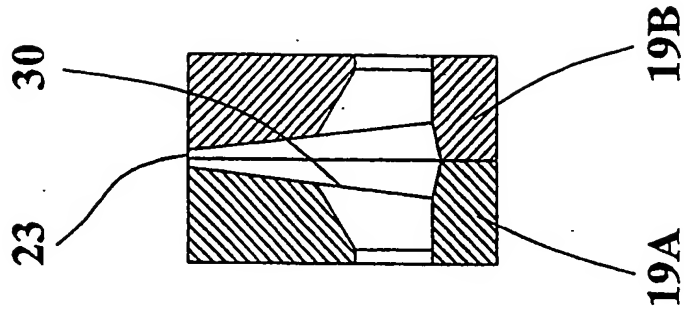

**FIG.4**

Rec'd PCPTO 28 SEP 2004

INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/01205

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B65B35/16 B65B35/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65B B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 872 436 A (PACTEC VERPACKUNGSMASCHINEN FA) 21 October 1998 (1998-10-21)	1-6
Y	column 5, line 16 -column 6, line 49; figures 1-3	7-11,18
Y	EP 0 465 666 A (IKEGAMI TSUSHINKI KK) 15 January 1992 (1992-01-15) the whole document	7-9
Y	US 4 514 963 A (BRUNO CARLO L) 7 May 1985 (1985-05-07) column 2, line 16 -column 3, line 18; figures 1-5	10,11,18
A	EP 0 608 824 A (AZIONARIA COSTRUZIONI) 3 August 1994 (1994-08-03) the whole document	1
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

8 July 2003

Date of mailing of the international search report

15/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vigilante, M

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 03/01205

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	US 6 446 789 B1 (GOODMAN JAMES A) 10 September 2002 (2002-09-10) the whole document ---	1
P,A	EP 1 270 459 A (AZIONARIA COSTRUZIONI) 2 January 2003 (2003-01-02) the whole document -----	1



## INTERNATIONAL SEARCH REPORT

 International Application No  
 PCT/IB 03/01205

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0872436	A	21-10-1998	DE 19715949 A1 EP 0872436 A1	22-10-1998 21-10-1998
EP 0465666	A	15-01-1992	DE 69108622 D1 DE 69108622 T2 EP 0465666 A1 US 5695043 A WO 9111377 A1	11-05-1995 17-08-1995 15-01-1992 09-12-1997 08-08-1991
US 4514963	A	07-05-1985	IT 1154405 B DE 3266254 D1 DE 83913 T1 EP 0083913 A1 JP 58160221 A	21-01-1987 17-10-1985 05-01-1984 20-07-1983 22-09-1983
EP 0608824	A	03-08-1994	IT 1266231 B1 EP 0608824 A1 JP 6345046 A US 5493847 A	27-12-1996 03-08-1994 20-12-1994 27-02-1996
US 6446789	B1	10-09-2002	NONE	
EP 1270459	A	02-01-2003	IT 8020010394 A1 BR 0202318 A EP 1270459 A1 US 2002195315 A1	23-12-2002 08-04-2003 02-01-2003 26-12-2002